
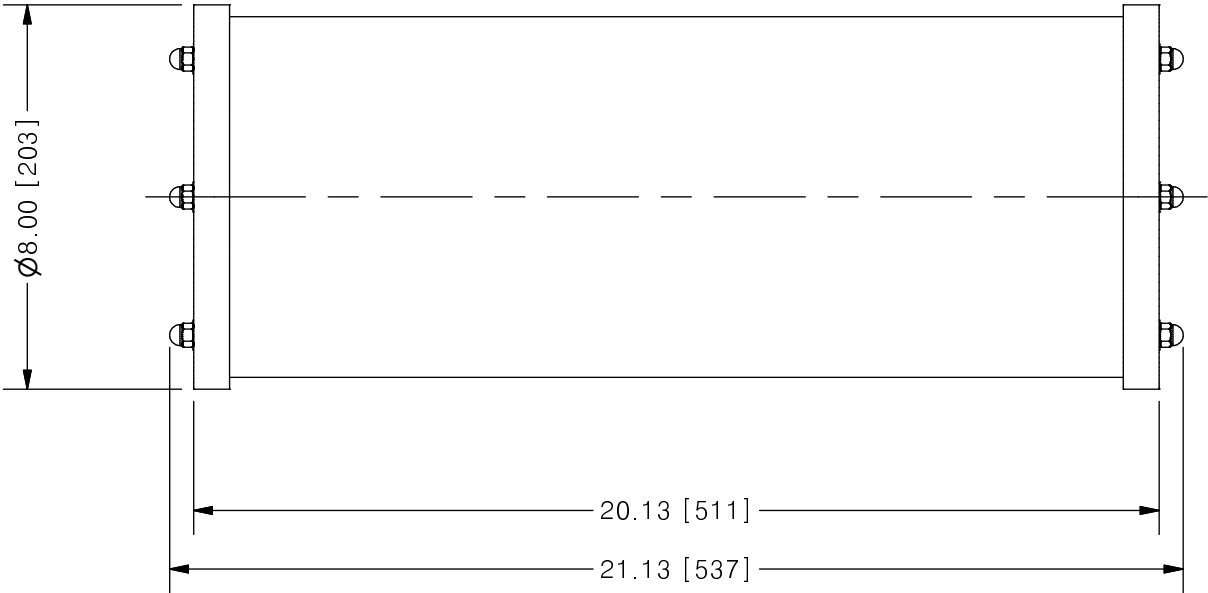


THIS DRAWING IS THE PROPERTY OF PRIMARY FLUID SYSTEMS INC. FROM WHICH A WRITTEN CONSENT FOR APPROVAL SHALL BE REQUIRED PRIOR TO COPYING.


	NO.	NAME	DESCRIPTION
	1	MAX ALLOWABLE OPERATING TEMPERATURE	140°F (60°C)
	2	MAX ALLOWABLE OPERATING PRESSURE	15 PSIG
	3	LEAK TEST	YES
CONNECTIONS	4	BOTTOM PORT CONNECTION	2"
	5	TOP PORT CONNECTION	2"
	6	TYPE	NPT
MATERIALS	7	CYLINDER	GLASS
	8	END CAPS	CPVC
	9	GLASS SEALING 'O' RINGS	VITON
MATERIAL NON WETTED	10	OUTER SHIELD	POLYCARBONATE
	11	SHIELD SEALING 'O' RINGS	BUNA-N
INPUT DATA	12	VOLUME SIZE	6000 ML
SCALE	13	GRADUATION	50 ML
COMMENTS	14	ALL CYLINDERS ARE RATED FOR LIQUID SERVICE ONLY	
	15	CYLINDERS ARE NOT PRESSURE VESSELS	

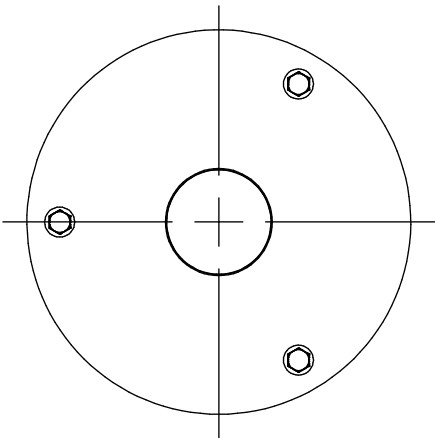

ACCUDRAW®
ACS#2 GLASS CALIBRATION CYLINDER

SCALE 1 : 4

0	NEW DRAWING	--	--
REV	DESCRIPTION	DATE	NAME
REVISION HISTORY			

 PRIMARY FLUID SYSTEMS INC. 1050 COOKE BLVD, BURLINGTON, ONTARIO L7T 4A8	PROJECT: ACS		SHT: 1 OF 1	DRAWN BY: NG	REV# 0	
	DATE DRAWN: 5/17/2016		SCALE: 1 : 4	UNITS: INCH [mm]		
	TITLE: 6000 ML CALIBRATION CYLINDER WITH 2" NPT CONNECTION		MATERIAL: SEE CHART			SHEET SIZE: B
			DWG NO: ACS#2-6000-GCV_R0			
DWG NAME: ACS CYLINDER		APPROVED BY:	CHECKED BY:	THIRD ANGLE PROJECTION 		
DWG TYPE: PLANAR VIEW						
		DIMENSIONAL TOLERANCE 0.X = ± 0.25" 0.XX = ± 0.25" 0.XXX = ± 0.25"				