
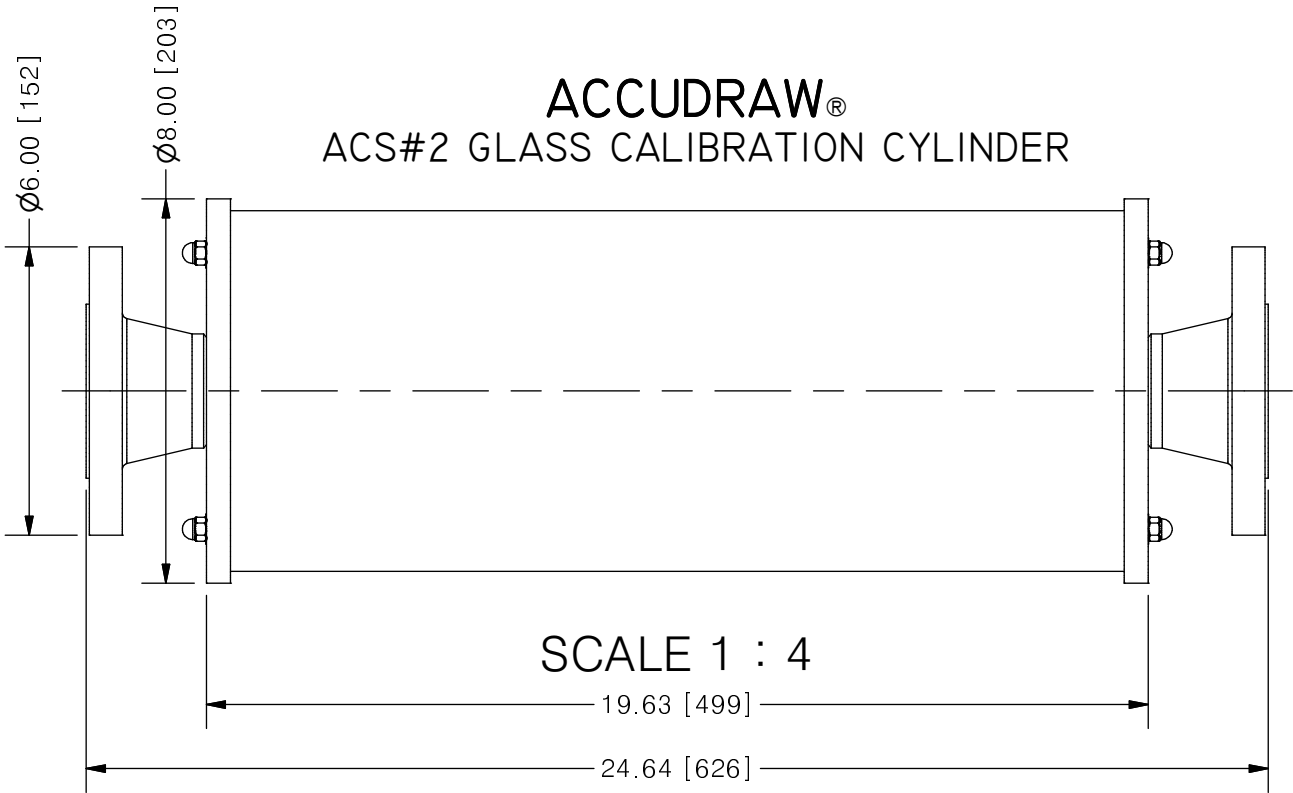
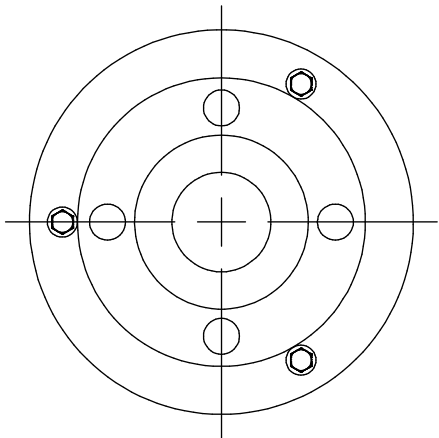


THIS DRAWING IS THE PROPERTY OF PRIMARY FLUID SYSTEMS INC. FROM WHICH A WRITTEN CONSENT FOR APPROVAL SHALL BE REQUIRED PRIOR TO COPYING.

	NO.	NAME	DESCRIPTION
	1	MAX ALLOWABLE OPERATING TEMPERATURE	140°F (60°C)
	2	MAX ALLOWABLE OPERATING PRESSURE	15 PSIG
	3	LEAK TEST	YES
CONNECTIONS	4	BOTTOM PORT CONNECTION	2"
	5	TOP PORT CONNECTION	2"
	6	TYPE	FLANGE ANSI B16.5
MATERIALS	7	CYLINDER	GLASS
	8	END CAPS	STAINLESS STEEL
	9	FLANGE	STAINLESS STEEL
	10	GLASS SEALING 'O' RINGS	VITON
MATERIAL NON WETTED	11	OUTER SHIELD	POLYCARBONATE
	12	SHIELD SEALING 'O' RINGS	BUNA-N
INPUT DATA	13	VOLUME SIZE	6000 ML
SCALE	14	GRADUATION	50 ML
COMMENTS	15	ALL CYLINDERS ARE RATED FOR LIQUID SERVICE ONLY	
	16	CYLINDERS ARE NOT PRESSURE VESSELS	



0	NEW DRAWING	--	--
REV	DESCRIPTION	DATE	NAME
REVISION HISTORY			

 PRIMARY FLUID SYSTEMS INC. 1050 COOKE BLVD, BURLINGTON, ONTARIO L7T 4A8	PROJECT: ACS		SHT: 1 OF 1	DRAWN BY: NG	REV# 0	
	DATE DRAWN: 5/17/2016		SCALE: 1 : 4	UNITS: INCH [mm]		
	TITLE: 6000 ML CALIBRATION CYLINDER WITH 2" FLANGE CONNECTION		MATERIAL: SEE CHART			SHEET SIZE: B
			DWG NO: ACS#2-6000-GSV-F_R0			
DWG NAME: ACS CYLINDER		APPROVED BY:	CHECKED BY:	THIRD ANGLE PROJECTION	11 X 17	
DWG TYPE: PLANAR VIEW						
		DIMENSIONAL TOLERANCE 0.X = ± 0.25" 0.XX = ± 0.25" 0.XXX = ± 0.25"				