

# ACCU-VENT

## Automatic Degassing Valves

### 2008 U.S. Price List


- Standard construction is CPVC (Corzan) body with a Viton ring seal
- 150 PSIG maximum pressure rating
- (Optional body and seal material available upon request)

<i>Model</i>	<i>Material of Construction</i>	<i>Bottom Connection</i>	<i>Max. Temperature</i>	<i>List Price</i>
AV-50-CPVC	CPVC and Viton	NPT or BSPT Thr'd	180°F (82°C)	\$ 145.00
AV-50-CPVC-S	CPVC and Viton	Socketweld	180°F (82°C)	\$ 145.00
AV-75-CPVC	CPVC and Viton	NPT or BSPT Thr'd	180°F (82°C)	\$ 145.00
AV-75-CPVC-S	CPVC and Viton	Socketweld	180°F (82°C)	\$ 145.00

### Typical Installations

The installation below is a typical installation example only. Consult your Engineering Department for the appropriate installation for your application or call the factory for advice.

**Example B: System arrangement for solenoid driven (above 150 psig) or motor driven pumps, with highly recommended flooded suction conditions.**

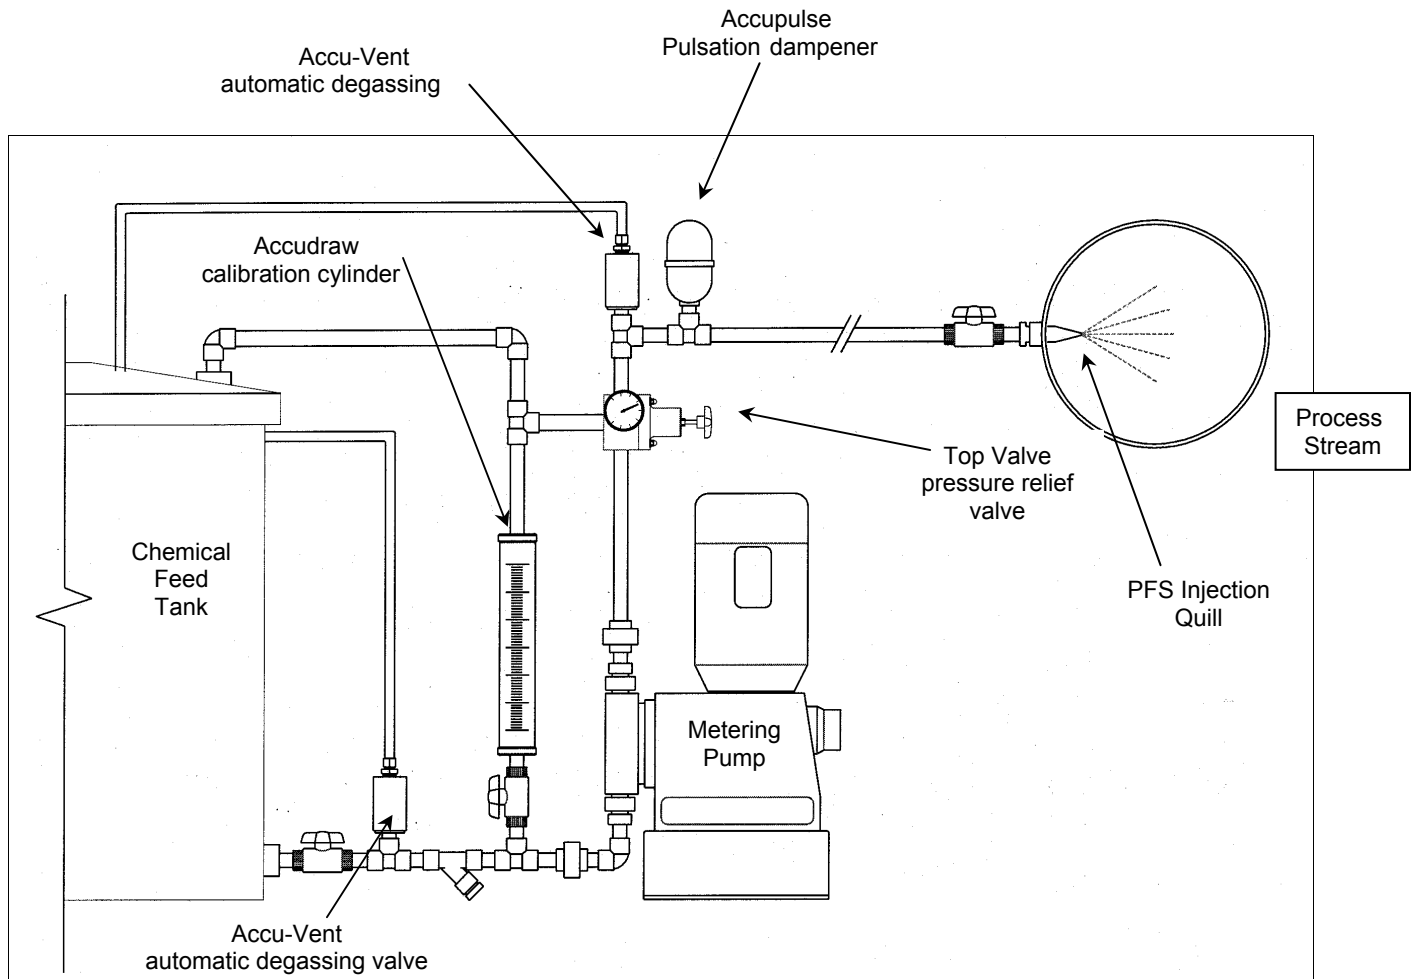

**Call Toll Free 1-800-776-6580**