


ACCUDRAW®

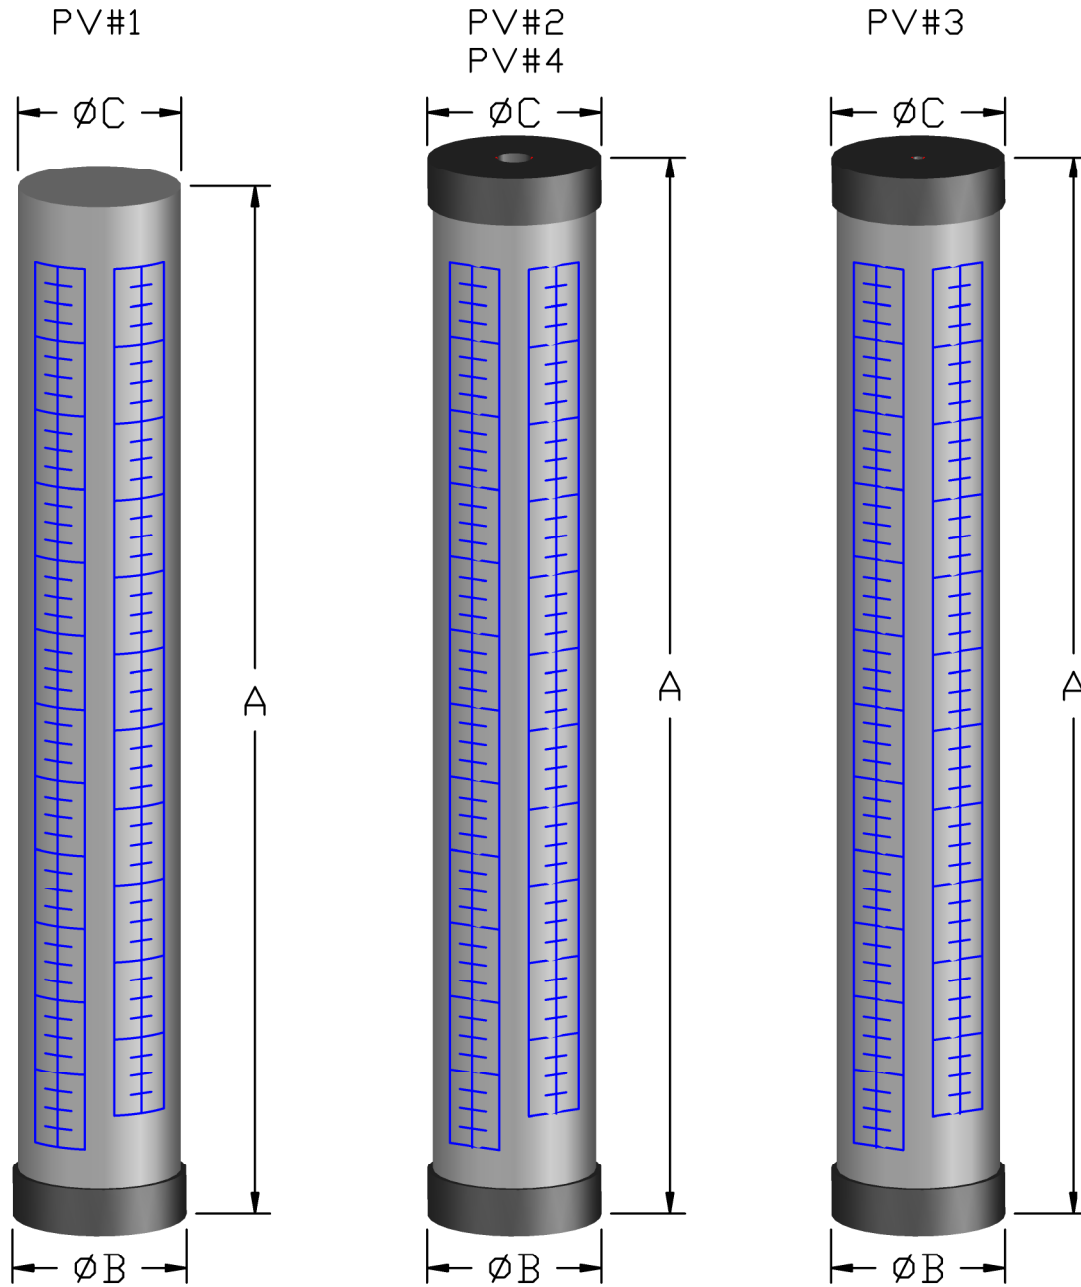

MODEL	SIZE ml(GPH)	DIV ml(GPH)	A (in.)	ØB (in.)	ØC (in.)	Connection	Top Conn.
PV#1	100 (1.60)	1.0 (0.02)	10.13	1.4	1.1	1/2" (DN 15)	OPEN
	250 (4.00)	2.0 (0.05)	10.88	1.9	1.6		
	500 (8.00)	5.0 (0.05)	12.13	2.4	2.1		
	1000 (16.0)	10.0 (0.125)	16.13	2.8	2.5	1" (DN 25)	
	2000 (32.0)	20.0 (0.25)	20.00	3.5	3.1		
	4000 (64.0)	25.0 (0.25)	22.00	4.5	4.1	2" (DN 50)	
	10000 (160)	200.0 (2.00)	22.50	6.9	6.5		
	15000 (240)	200.0 (2.00)	32.50	6.9	6.5		
20000 (320)	200.0 (2.00)	42.50	6.9	6.5			
PV#2 & PV#4	100 (1.60)	1.0 (0.02)	10.50	1.4	1.4	1/2" (DN 15)	1/2" (DN 15)
	250 (4.00)	2.0 (0.05)	11.25	1.9	1.9		
	500 (8.00)	5.0 (0.05)	12.50	2.4	2.4		1" (DN 25)
	1000 (16.0)	10.0 (0.125)	16.50	2.8	2.8		
	2000 (32.0)	20.0 (0.25)	20.50	3.5	3.5	2" (DN 50)	2" (DN 50)
	4000 (64.0)	25.0 (0.25)	22.50	4.5	4.5		
	10000 (160)	200.0 (2.00)	23.00	6.9	6.9		
	15000 (240)	200.0 (2.00)	33.00	6.9	6.9		
PV#2	20000 (320)	200.0 (2.00)	43.00	6.9	6.9	2" (DN 50)	2" (DN 50)
	30000 (480)	200.0 (2.00)	39.00	9.1	9.1		
	40000 (640)	200.0 (2.00)	50.00	9.1	9.1		
	50000 (800)	200.0 (2.00)	62.00	9.1	9.1		
PV#3	100 (1.60)	1.0 (0.02)	10.50	1.4	1.4	1/2" (DN 15)	DUST CAP
	250 (4.00)	2.0 (0.05)	11.25	1.9	1.9		
	500 (8.00)	5.0 (0.05)	12.50	2.4	2.4		
	1000 (16.0)	10.0 (0.125)	16.50	2.8	2.8	1" (DN 25)	
	2000 (32.0)	20.0 (0.25)	20.50	3.5	3.5		
	4000 (64.0)	25.0 (0.25)	22.50	4.5	4.5	2" (DN 50)	
	10000 (160)	200.0 (2.00)	23.00	6.9	6.9		
	15000 (240)	200.0 (2.00)	33.00	6.9	6.9		
20000 (320)	200.0 (2.00)	43.00	6.9	6.9			

NOTE:
PV#4 CALIBRATION CYLINDERS HAVE
REMOVABLE TOP CAPS.

DO NOT COPY WITHOUT PRIOR WRITTEN APPROVAL FROM PRIMARY FLUID SYSTEMS INC.

PRIMARY FLUID SYSTEMS INC.
1050 Cooke Blvd., Burlington, Ontario L7T 4A8

ACCUDRAW PV-SERIES
CALIBRATION CYLINDERS (PVC)

DATE DRAWN: JULY-29-2014 | SCALE: NTS | SHEET: 1 OF 1

TOLERANCE: +/- 0.25" | DRAWN BY: NEAL YOON

APPROVED BY: | CHECKED BY: | DWG NO: ADV_PV_CALCYL1 | REV.# 5